



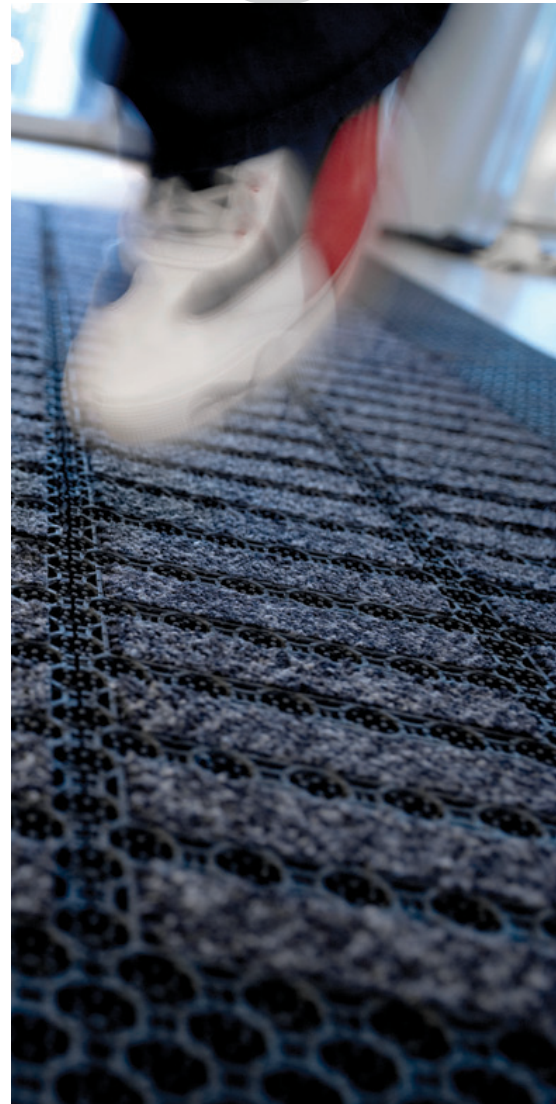

Joy Carpets & Co.

1 2 3

WeatherGuard™ [entrance flooring]

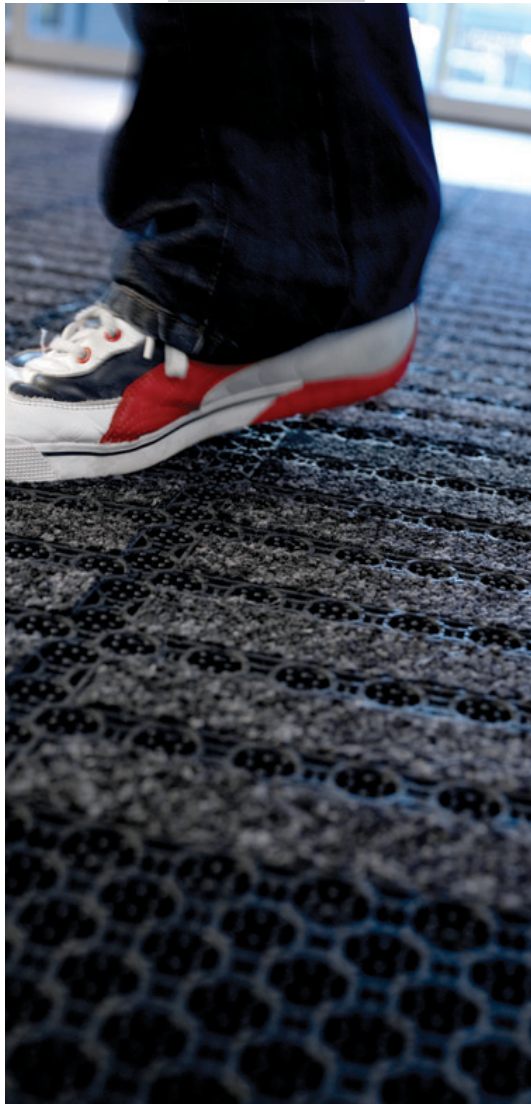



WeatherGuard™ [entrance flooring]




Choosing proper flooring for a commercial entrance is a critical business decision. Even the most well-designed and aesthetically pleasing interiors are not immune to the adverse affects of heavy foot traffic.

With the appropriate flooring strategy in place, foot-borne soil and moisture remain outdoors; protecting the building's interior while minimizing maintenance costs and accidents.

Joy Carpets' WeatherGuard™ Entrance Flooring is a 3-part solution designed for commercial entrances and circulation areas. Unique interlocking scraper tiles combined with coordinating walk-off matting creates the most innovative and attractive entrance flooring system available.


1



FIRST STEPS™

Primary scraper tile for removing and retaining heavy soil.


2



CONCIERGE™

Scraper tile with textile insert for capturing smaller particles and moisture.

3



WALK-OFF MATS

Non-skid mat for controlling soil and moisture in circulation areas.

1

FIRST STEPS™

First Steps™ is a primary barrier walk-off tile designed with an aggressive scraper texture to remove, capture, and contain heavy foot-borne soil. Manufactured in a 100% PVC closed cell construction, these interlocking tiles can be easily installed indoors or out with a minimum of waste.



PRIMARY ENTRANCE WALK-OFF TILE

SNAPTITE® INSTALLATION SYSTEM

7.68"L X 7.68"W X .43"H

UV RESISTANT PVC - CLOSED CELL CONSTRUCTION

EXTREMELY DURABLE



INDOOR / OUTDOOR APPLICATIONS

INSTALLED ON SURFACE OR IN MAT WELL


SURFACE INSTALLATION EDGING SYSTEM AVAILABLE

5 YEAR WEAR WARRANTY



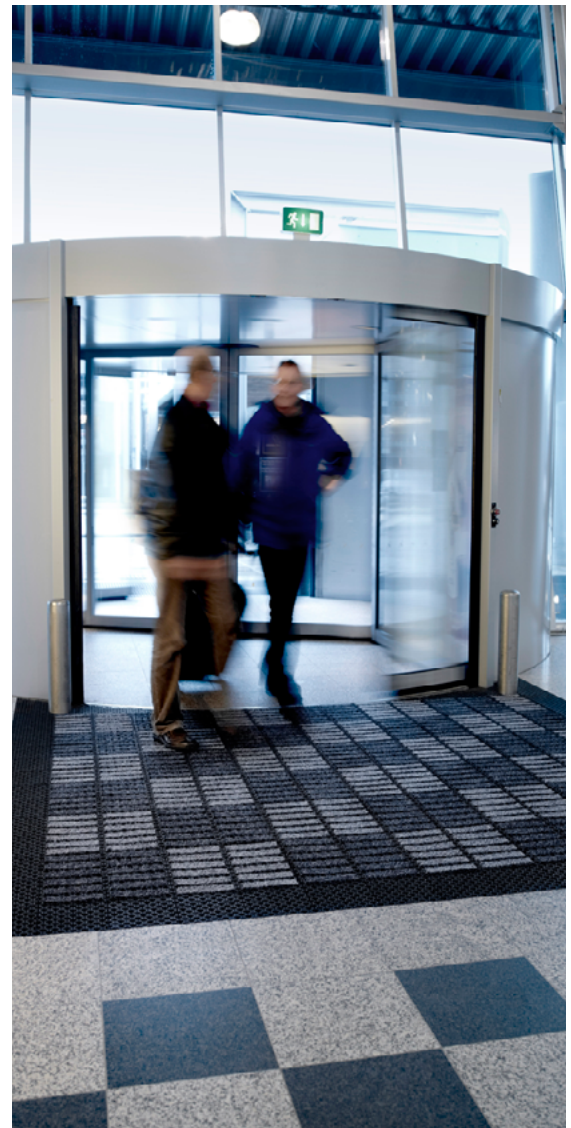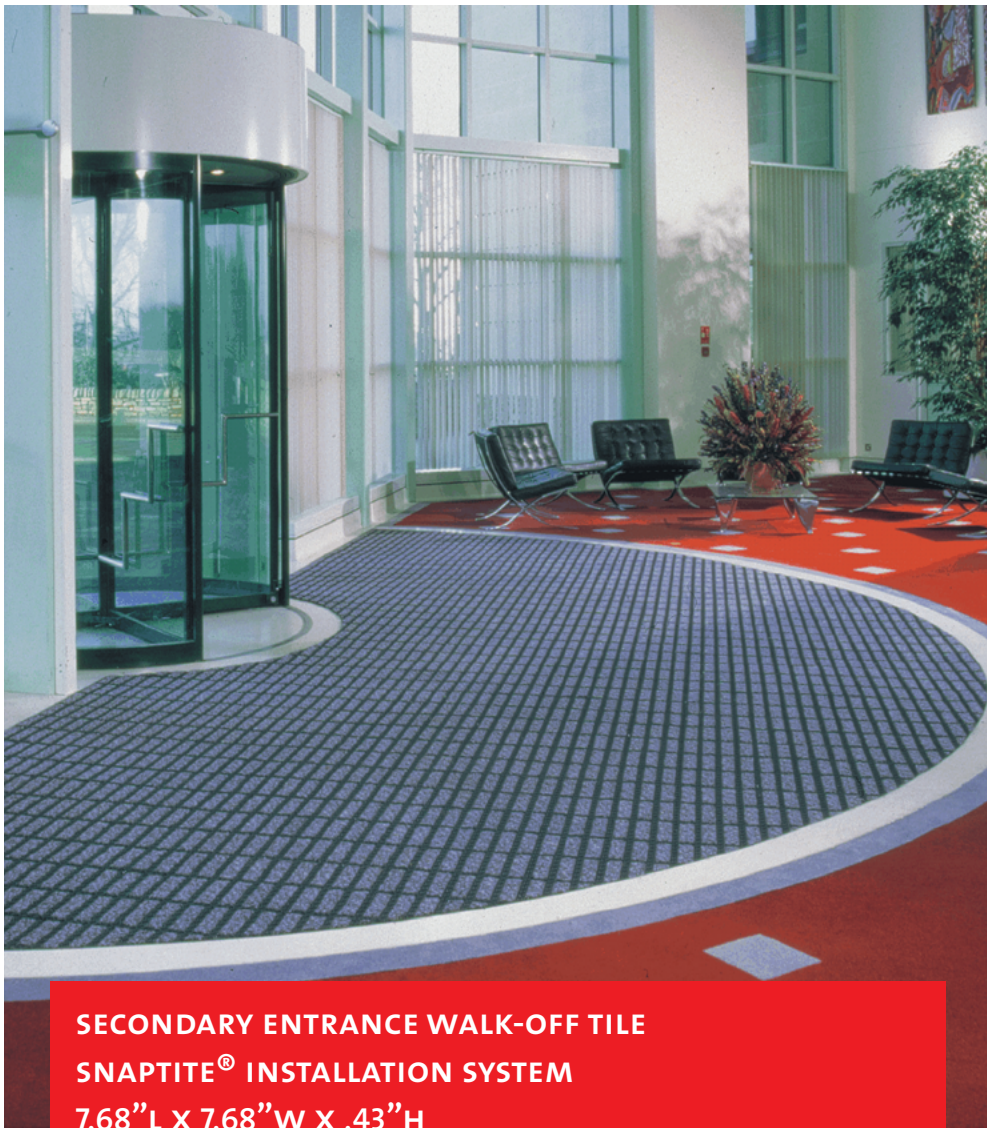

SECONDARY ENTRANCE WALK-OFF TILE
SNAPTITE® INSTALLATION SYSTEM
7.68" L X 7.68" W X .43" H
UV RESISTANT PVC/NYLON - CLOSED CELL CONSTRUCTION
EXTREMELY DURABLE
INDOOR APPLICATION ONLY
INSTALLED ON SURFACE OR IN MAT WELL
SURFACE INSTALLATION EDGING SYSTEM AVAILABLE
5 YEAR WEAR WARRANTY



COLOR OPTIONS:
 01-GLACIER, 02-CHARCOAL,
 03-ROYAL BLUE, 04-RUST, 05-ASH,
 06-RED, 07-GREEN, 08-BARK



2

CONCIERGE™

Concierge™ is a secondary barrier walk-off tile combining the aggressive scraper action of First Steps™ with resilient nylon inserts removing finer foot-borne soil particulates and moisture. Manufactured in a closed cell construction, Concierge™ is ideal for indoor use and can be interlocked with First Steps™ to create the ultimate in entrance flooring systems.

3

CORPORATE IMAGE™

Promote your brand with our fully customizable entrance mats. Injection dyed with brilliant color, these commercial, non-skid mats are ideal for making a positive first impression right at the door.

SIZE OPTIONS*: 3'x4', 3'x5', 4'x6', 3'x10'

CIRCULATION AREA MAT
NON-SKID, PREMIUM NITRILE RUBBER BACK
INJECTION DYED NYLON CUT PILE CONSTRUCTION
EXTREMELY DURABLE
UV RESISTANT
BLEACH RESISTANT
FOR INDOOR OR OUTDOOR USE
5 YEAR WEAR WARRANTY




PROMENADE™

Promenade™ is a non-skid, washable mat available in 10 color options to match any interior decor. Designed for entryways and circulation areas, these commercial grade mats are perfect for controlling fine dirt, dust, and moisture in entryways and high traffic areas where slips and falls are most likely to occur.

PROMENADE COLOR OPTIONS:

01-CABERNET, 02-CHEYENNE RED, 03-COFFEE, 04-FLAGSTONE, 05-FRONTIER GRAY, 06-HONEYCOMB, 07-OXFORD GRAY, 08-SPRUCE GREEN, 09-TUXEDO BLACK, 10-WINDSOR BLUE

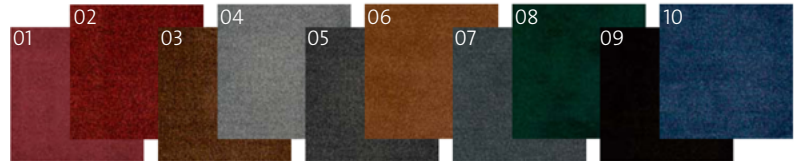

SIZE OPTIONS*: 3'x4', 3'x5', 4'x6', 3'x10'

CIRCULATION AREA MAT
NON-SKID, PREMIUM NITRILE RUBBER BACK
SOLUTION DYED NYLON CUT PILE CONSTRUCTION
EXTREMELY DURABLE
UV RESISTANT
BLEACH RESISTANT
FOR INDOOR OR OUTDOOR USE
5 YEAR WEAR WARRANTY



*SIZES ARE APPROXIMATIONS - ACTUAL CARPET COLOR MAY VARY SLIGHTLY FROM BROCHURE

Specifications and Warranties

	FIRST STEPS™	CONCIERGE™	PROMENADE™	CORPORATE IMAGE™
DESCRIPTION	Modular entrance matting	Modular entrance matting	Walk off mat	Walk off mat
TILE CONSTRUCTION	UV resistant PVC	UV resistant PVC with fabric insert	n/a	n/a
TILE COLOR	Graphite	Graphite	n/a	n/a
TILE SIZE (L X W X H)	8.25" x 8.25" x .375"	8.25" x 8.25" x .375"	n/a	n/a
TILE SIZE IN USE (L X W X H)	7.75" x 7.75" x .375"	7.75" x 7.75" x .375"	n/a	n/a
FABRIC CONSTRUCTION	n/a	Tufted Cut Pile	Tufted Cut Pile	Tufted Cut Pile
FACE FIBER	n/a	Twisted, heat set type 6,6 nylon	Twisted, heat set type 6,6 nylon	Twisted, heat set type 6,6 nylon
DYE METHOD	n/a	Injection dyed	Solution dyed	Injection dyed
BACKING	n/a	n/a	Nitrile rubber with gripper cleats	Nitrile rubber with gripper cleats
MAT PROFILE	n/a	n/a	.45"	.33"
TUFTED FACE WEIGHT	n/a	n/a	19 oz. / sqyd	21 oz. / sqyd
ANTISTATIC	n/a	n/a	Yes	Yes
ANTISTAIN TREATMENT	n/a	n/a	Yes	KMT™
BORDER WIDTH	n/a	n/a	.625"	.75"
FADE RESISTANT	Yes	Yes	Yes	Yes
BLEACH RESISTANT	Yes	No	Yes	No
INSTALLATION	Snapтите™ interlocking system	Snapтите™ interlocking system	n/a	n/a
FLAMMABILITY	Low radius of effect of ignition (BS 4790)	Low radius of effect of ignition (BS 4790)	Pass (DOC FF1, FF2 -70)	Pass (DOC FF1, FF2 -70)
WEAR RESISTANCE	Vetterman 22,000 cycles	Vetterman 22,000 cycles	n/a	n/a
MAINTENANCE	Vacuum regularly. Pressure wash	Vacuum regularly. Wet extraction*	Vacuum regularly. Machine wash.	Vacuum regularly. Machine wash.
WEAR WARRANTY	5 years	5 years	5 years	5 years

SURFACE-MOUNT, TAPERED EDGING SYSTEM FOR FIRST STEPS™ AND CONCIERGE™

CONSTRUCTION	UV resistant PVC
COLOR	Graphite
LENGTH	15.75"
INSTALLATION	Snapтите™ interlocking system

*Water temp to not exceed 122 degrees Fahrenheit
 Specifications are subject to normal manufacturing tolerance.
 Sizes are approximate and carpet color may vary.



Joy Carpets & Co.

corporate headquarters: 2640 Lafayette Rd. Fort Oglethorpe, GA 30742

distribution center: 104 West Forrest Rd. Fort Oglethorpe, GA 30742

phone: 800.645.2787 fax: 706.866.7928

www.joycarpets.com

©2013 joy carpets & co. all rights reserved